


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:120.43V I:0.5121A P:61.149W PF:0.9915 Freq:59.98Hz Lamp Flux:8402.78x1 lm		
NAME: TS-60W-W	TYPE:	WEIGHT:
SPEC.: 280*280	DIM.:	SERIAL No.: 20240417002
MFR.:	SUR.: 280*280	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 137.41 lm/W			
MODEL	TS-60W-W	I _{max} (cd)	2474	S/MH(C0/180)	1.47
NOMINAL POWER(W)	60	LOR(%)	100.0	S/MH(C90/270)	1.53
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	8402.8	η UP, DN(C0-180)	1.4, 49.1
NOMINAL FLUX(lm)	8402.78	CIE CLASS	DIRECT	η UP, DN(C180-360)	1.4, 48.2
LAMPS INSIDE	1	η up(%)	2.7	CIBSE SHR NOM	1.75
TEST VOLTAGE(V)	120	η down(%)	97.3	CIBSE SHR MAX	1.75

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

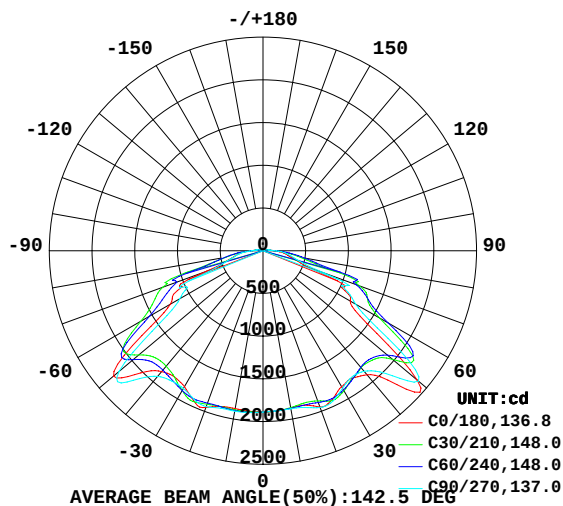

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

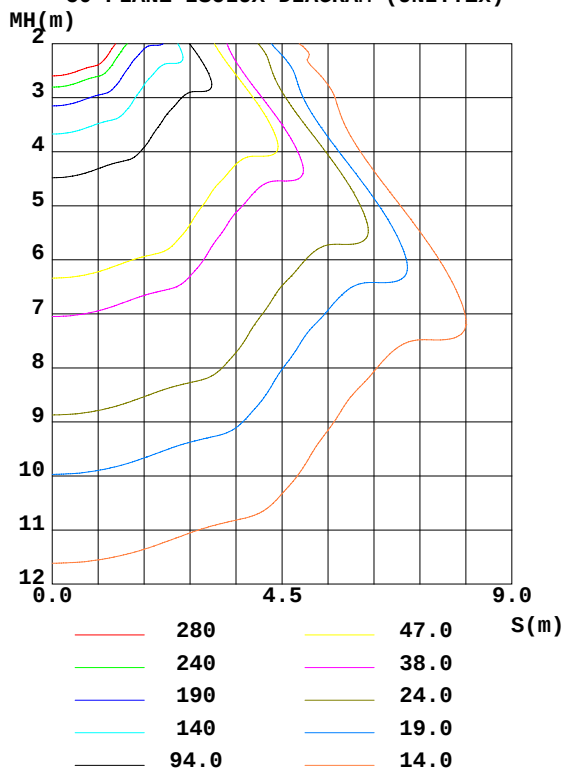

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.4DEG
Operators: DAMIN
Test Date: 17 April 2024

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.00.446
Humidity: 65.0%
Test Distance: 7.550m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1870	1870	1879	1872	1876	1896	1905	1895	0- 10	180.1	180.1	2.14, 2.14
20	1947	1880	1952	1896	1952	1905	1941	1888	10- 20	535.2	715.3	8.51, 8.51
30	1839	1888	1860	1902	1837	1890	1864	1885	20- 30	885.5	1601	19.1, 19.1
40	1895	1784	1843	1782	1847	1794	1920	1805	30- 40	1153	2754	32.8, 32.8
50	2356	1939	2374	1894	2281	1941	2198	2010	40- 50	1491	4245	50.5, 50.5
60	1179	1635	1254	1702	1254	1594	1125	1545	50- 60	1663	5908	70.3, 70.3
70	557.3	1181	764.8	1221	700.4	1160	589.6	1121	60- 70	1246	7154	85.1, 85.1
80	293.4	470.6	320.5	474.5	322.3	448.7	316.4	436.4	70- 80	725.5	7879	93.8, 93.8
90	126.9	131.4	137.1	143.1	131.8	128.6	128.5	123.8	80- 90	292.8	8172	97.3, 97.3
100	61.03	56.18	64.94	59.59	68.20	59.40	65.80	56.91	90-100	97.74	8270	98.4, 98.4
110	34.51	31.38	37.10	32.87	38.60	33.24	38.32	31.99	100-110	48.42	8318	99, 99
120	22.00	19.72	23.84	20.50	25.37	21.26	24.25	20.57	110-120	27.28	8346	99.3, 99.3
130	16.48	16.92	16.67	16.93	17.85	18.04	17.77	18.09	120-130	16.63	8362	99.5, 99.5
140	16.76	17.21	17.12	17.24	17.76	18.25	17.73	18.20	130-140	13.55	8376	99.7, 99.7
150	17.96	17.90	17.85	17.92	18.54	18.54	18.48	18.52	140-150	11.21	8387	99.8, 99.8
160	18.73	18.65	18.71	18.66	18.83	18.78	18.78	18.75	150-160	8.550	8396	99.9, 99.9
170	18.99	19.01	19.10	19.07	18.98	18.96	18.88	18.98	160-170	5.350	8401	100, 100
180	18.92	19.02	18.93	19.09	18.95	19.03	18.93	19.08	170-180	1.815	8403	100, 100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.4DEG
 Operators: DAMIN
 Test Date: 17 April 2024

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE G0-2000A_V1 SYSTEM V2.00.446
 Humidity: 65.0%
 Test Distance: 7.550m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.43V I:0.5121A P:61.149W PF:0.9915 Freq:59.98Hz Lamp Flux:8402.78x1 lm		
NAME: TS-60W-W	TYPE:	WEIGHT:
SPEC.: 280*280	DIM.:	SERIAL No.: 20240417002
MFR.:	SUR.: 280*280	Shielding Angle:

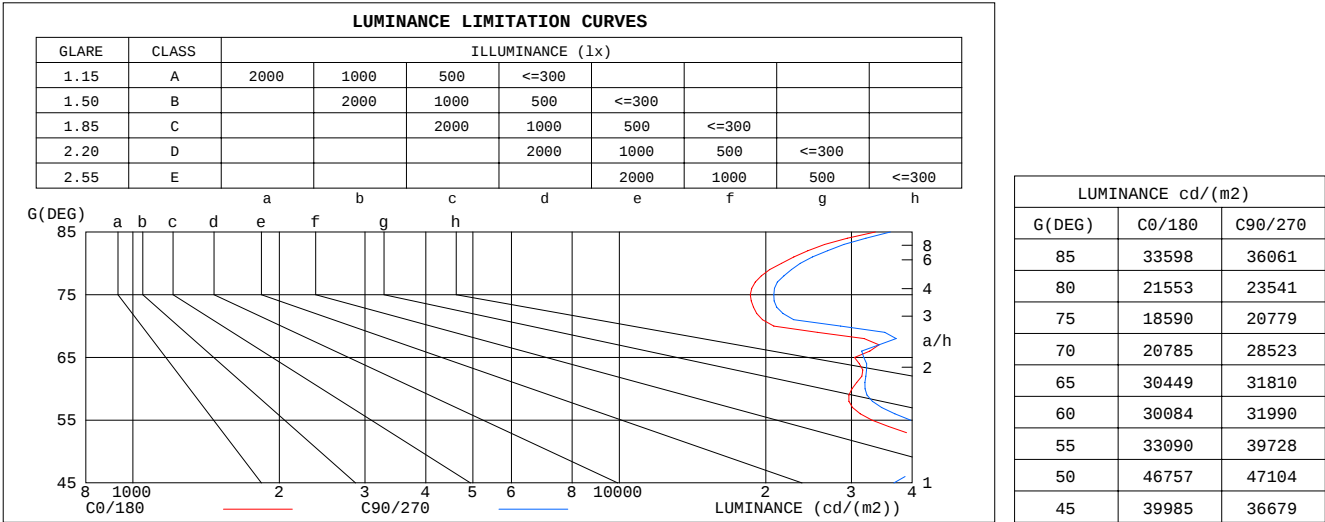


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.4DEG
Operators:DAMIN
Test Date:17 April 2024

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:7.550m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.43V I:0.5121A P:61.149W PF:0.9915 Freq:59.98Hz Lamp Flux:8402.78x1 lm		
NAME: TS-60W-W	TYPE:	WEIGHT:
SPEC.: 280*280	DIM.:	SERIAL No.: 20240417002
MFR.:	SUR.: 280*280	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

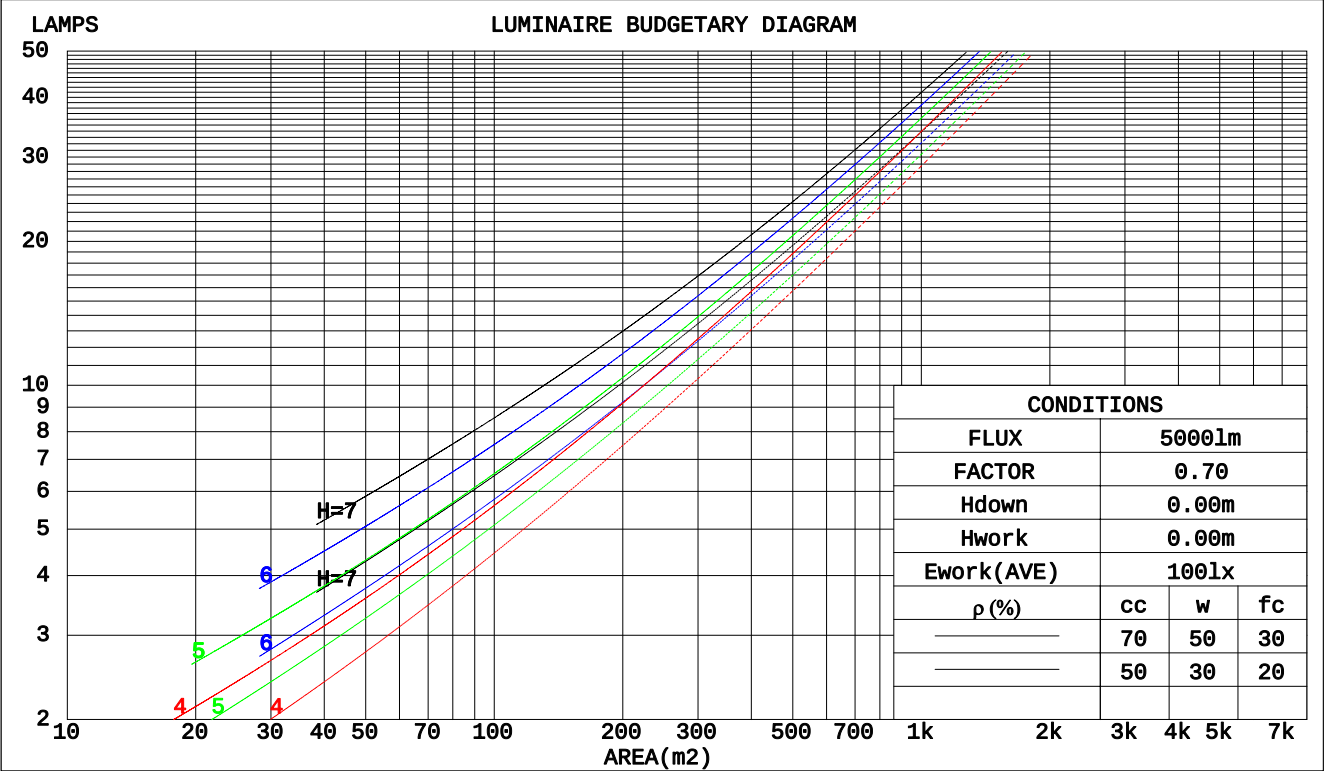

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.4DEG
Operators:DAMIN
Test Date:17 April 2024

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:7.550m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:120.43V I:0.5121A P:61.149W PF:0.9915 Freq:59.98Hz Lamp Flux:8402.78x1 lm					
NAME: TS-60W-W			TYPE:		WEIGHT:
SPEC.: 280*280			DIM.:		SERIAL No.: 20240417002
MFR.:			SUR.: 280*280		Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0	
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
ρ_{fc}	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.350	.199	.063	.342	.195	.062	.327	.188	.060	.314	.181	.058	.301	.174	.056		
2.0	.323	.177	.054	.316	.174	.054	.303	.168	.052	.290	.163	.051	.279	.158	.050		
3.0	.296	.157	.047	.289	.155	.047	.277	.150	.046	.266	.146	.045	.256	.142	.044		
4.0	.270	.140	.041	.265	.138	.041	.254	.135	.040	.244	.131	.040	.235	.127	.039		
5.0	.248	.126	.037	.243	.125	.036	.233	.121	.036	.224	.118	.035	.216	.115	.035		
6.0	.229	.115	.033	.224	.113	.033	.215	.110	.032	.207	.108	.032	.200	.105	.031		
7.0	.211	.105	.030	.207	.103	.029	.200	.101	.029	.192	.099	.029	.186	.096	.028		
8.0	.196	.096	.027	.193	.095	.027	.186	.093	.027	.179	.091	.026	.173	.089	.026		
9.0	.183	.089	.025	.180	.088	.025	.174	.086	.024	.168	.084	.024	.162	.082	.024		
10.0	.172	.082	.023	.169	.081	.023	.163	.080	.022	.158	.078	.022	.152	.077	.022		

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio			Ceiling Cavity Exitance Coefficients(CCEC)												
0.0	.211	.211	.211	.181	.181	.181	.123	.123	.123	.071	.071	.071	.023	.023	.023	
1.0	.204	.177	.152	.175	.152	.131	.120	.104	.091	.069	.060	.053	.022	.019	.017	
2.0	.198	.153	.115	.169	.132	.100	.116	.091	.070	.067	.053	.041	.021	.017	.013	
3.0	.191	.136	.092	.164	.117	.080	.112	.081	.056	.065	.048	.033	.021	.015	.011	
4.0	.183	.123	.077	.157	.106	.067	.108	.074	.047	.063	.043	.028	.020	.014	.009	
5.0	.176	.113	.066	.151	.098	.057	.104	.068	.041	.060	.040	.024	.019	.013	.008	
6.0	.169	.105	.059	.145	.091	.051	.100	.063	.036	.058	.037	.021	.019	.012	.007	
7.0	.162	.098	.053	.139	.085	.046	.096	.059	.033	.056	.035	.020	.018	.011	.006	
8.0	.155	.092	.049	.133	.080	.043	.092	.056	.030	.054	.033	.018	.017	.011	.006	
9.0	.149	.087	.046	.128	.076	.040	.089	.053	.028	.052	.031	.017	.017	.010	.006	
10.0	.143	.083	.043	.123	.072	.038	.085	.051	.027	.050	.030	.016	.016	.010	.005	

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.4DEG
 Operators:DAMIN
 Test Date:17 April 2024

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE G0-2000A_V1 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:7.550m [K=1.0000]
 Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.43V I:0.5121A P:61.149W PF:0.9915 Freq:59.98Hz Lamp Flux:8402.78x1 lm											
NAME: TS-60W-W					TYPE:			WEIGHT:			
SPEC.: 280*280					DIM.:			SERIAL No.: 20240417002			
MFR.:					SUR.: 280*280			Shielding Angle:			
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3	
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3	
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	
Room dimensions		Viewed crosswise					Viewed endwise				
x = 2H y = 2H	25.9	27.5	26.2	27.7	28.0	26.1	27.7	26.4	28.0	28.2	
	3H	27.3	28.8	27.6	29.1	29.4	27.6	29.1	27.9	29.4	29.7
	4H	27.6	29.1	28.0	29.4	29.7	28.0	29.4	28.4	29.7	30.0
	6H	27.9	29.2	28.3	29.6	29.9	28.3	29.6	28.7	29.9	30.3
	8H	28.0	29.3	28.4	29.7	30.0	28.4	29.7	28.8	30.1	30.4
	12H	28.2	29.4	28.6	29.8	30.2	28.6	29.9	29.0	30.2	30.6
4H	2H	26.7	28.1	27.1	28.5	28.8	26.9	28.3	27.3	28.6	28.9
	3H	28.6	29.8	29.0	30.2	30.6	28.8	30.0	29.2	30.4	30.7
	4H	29.1	30.2	29.5	30.6	31.0	29.4	30.5	29.8	30.9	31.3
	6H	29.4	30.4	29.9	30.9	31.3	29.8	30.8	30.2	31.2	31.6
	8H	29.6	30.6	30.1	31.0	31.4	30.0	30.9	30.4	31.4	31.8
	12H	29.8	30.7	30.3	31.2	31.6	30.2	31.1	30.7	31.5	32.0
8H	4H	29.5	30.5	30.0	30.9	31.3	29.8	30.7	30.2	31.1	31.6
	6H	30.1	30.8	30.5	31.3	31.8	30.4	31.2	30.9	31.6	32.1
	8H	30.4	31.1	30.9	31.5	32.0	30.7	31.4	31.2	31.9	32.4
	12H	30.7	31.3	31.2	31.8	32.4	31.1	31.7	31.6	32.2	32.8
12H	4H	29.5	30.4	30.0	30.8	31.3	29.8	30.7	30.3	31.1	31.6
	6H	30.2	30.9	30.7	31.3	31.9	30.5	31.2	31.0	31.7	32.2
	8H	30.5	31.1	31.1	31.6	32.2	30.9	31.5	31.4	32.0	32.5
Variations with the observer position at spacings(CIE Pub.117):											
S = 1.0H	+ 0.1 / - 0.2					+ 0.2 / - 0.2					
1.5H	+ 0.4 / - 0.5					+ 0.4 / - 0.8					
2.0H	+ 0.5 / - 0.8					+ 0.5 / - 0.8					

CIE Pub.117, 8403 lm Total Lamp Luminous Flux Corrected ($8\log(F/F_0) = 7.4$)
Area: 0.0784 m²

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.4DEG
Operators:DAMIN
Test Date:17 April 2024

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 γ Test System:EVERFINE G0-2000A_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:7.550m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.43V I:0.5121A P:61.149W PF:0.9915 Freq:59.98Hz Lamp Flux:8402.78x1 lm		
NAME: TS-60W-W	TYPE:	WEIGHT:
SPEC.: 280*280	DIM.:	SERIAL No.: 20240417002
MFR.:	SUR.: 280*280	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	50	37	30	49	37	30	48	37	29	22
0.80	61	47	39	59	47	39	57	46	39	31
1.00	70	57	49	68	56	48	66	58	48	40
1.25	77	65	57	75	64	57	72	63	56	47
1.50	83	71	63	81	70	63	77	68	61	53
2.00	90	80	73	88	79	72	84	77	70	62
2.50	95	86	79	92	84	78	88	81	76	66
3.00	99	91	84	96	89	83	92	86	81	71
4.00	103	96	91	100	94	89	96	91	86	76
5.00	106	100	95	103	98	94	98	94	90	80
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.4DEG
 Operators:DAMIN
 Test Date:17 April 2024

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE G0-2000A_V1 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:7.550m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.43V I:0.5121A P:61.149W PF:0.9915 Freq:59.98Hz Lamp Flux:8402.78x1 lm		
NAME: TS-60W-W	TYPE:	WEIGHT:
SPEC.: 280*280	DIM.:	SERIAL No.: 20240417002
MFR.:	SUR.: 280*280	Shielding Angle:

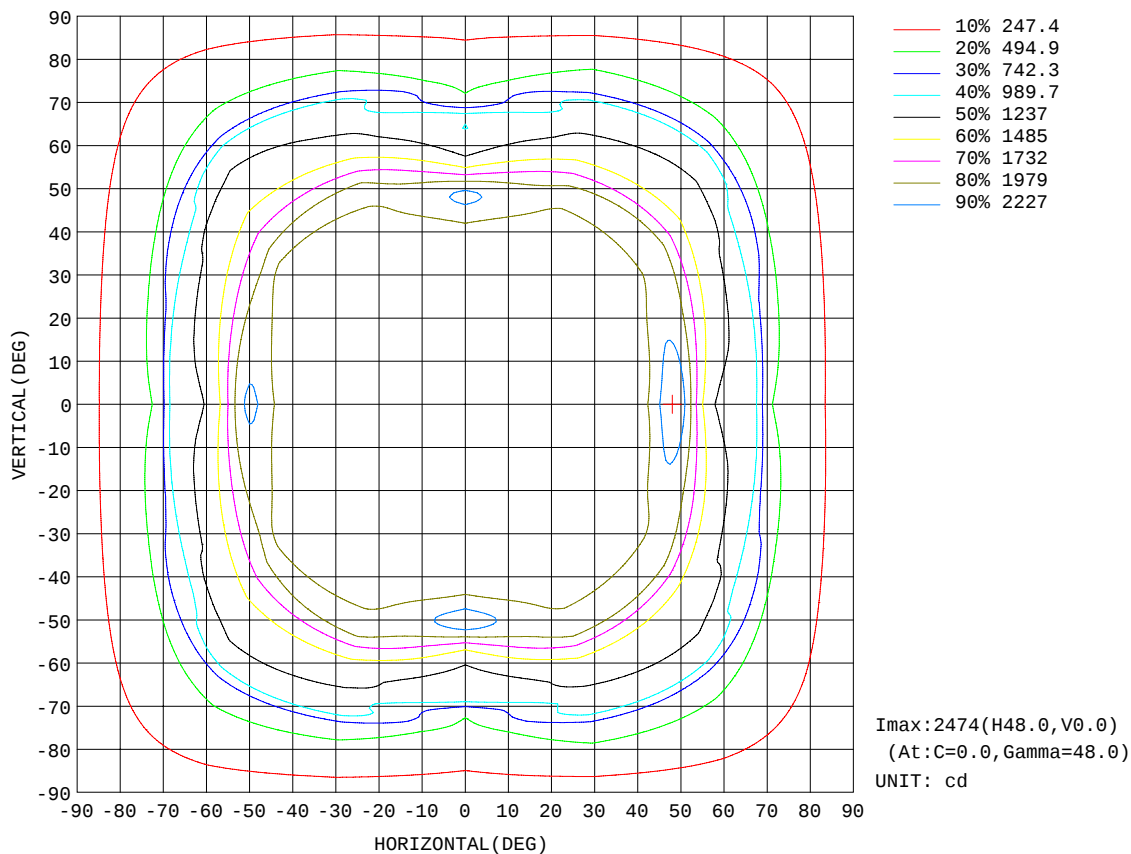


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.4DEG
Operators:DAMIN
Test Date:17 April 2024

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:7.550m [K=1.0000]
Remarks:

AAI CURVES

Test:U:120.43V I:0.5121A P:61.149W PF:0.9915 Freq:59.98Hz Lamp Flux:8402.78x1 lm		
NAME: TS-60W-W	TYPE:	WEIGHT:
SPEC.: 280*280	DIM.:	SERIAL No.: 20240417002
MFR.:	SUR.: 280*280	Shielding Angle:

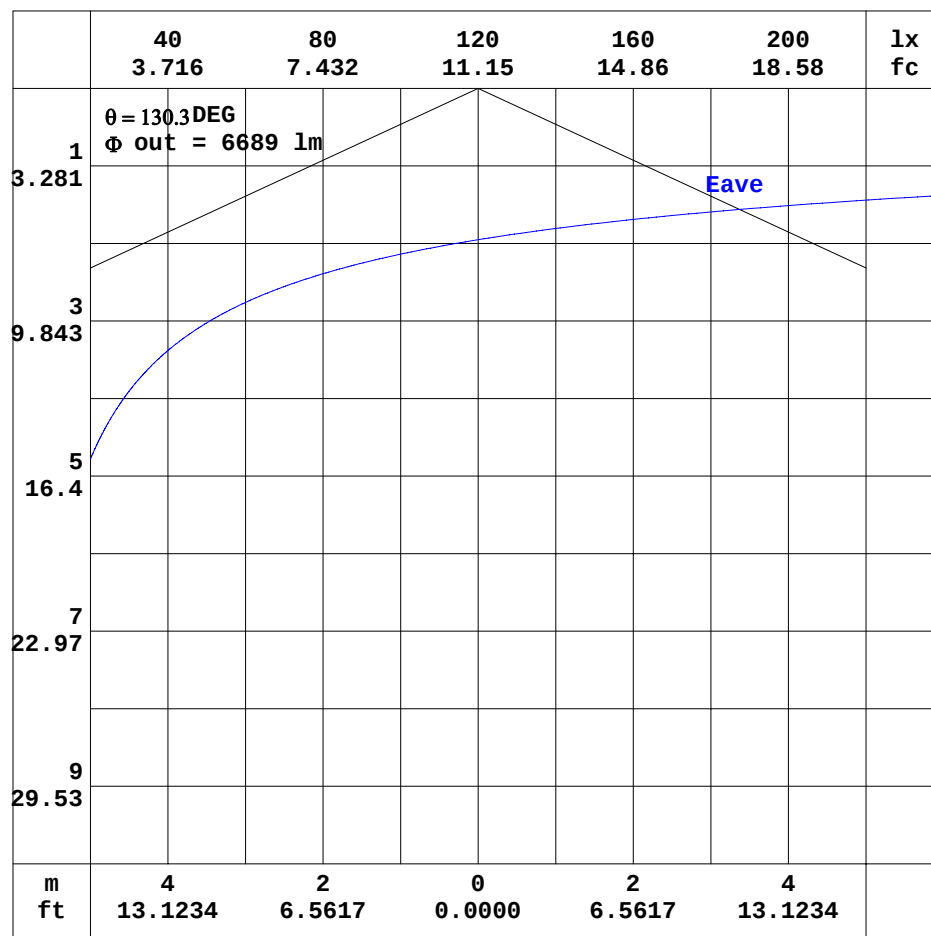


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.4DEG
 Operators: DAMIN
 Test Date: 17 April 2024

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE G0-2000A_V1 SYSTEM V2.00.446
 Humidity: 65.0%
 Test Distance: 7.550m [K=1.0000]
 Remarks:

ISOLUX DIAGRAM

Test:U:120.43V I:0.5121A P:61.149W PF:0.9915 Freq:59.98Hz Lamp Flux:8402.78x1 lm		
NAME: TS-60W-W	TYPE:	WEIGHT:
SPEC.: 280*280	DIM.:	SERIAL No.: 20240417002
MFR.:	SUR.: 280*280	Shielding Angle:

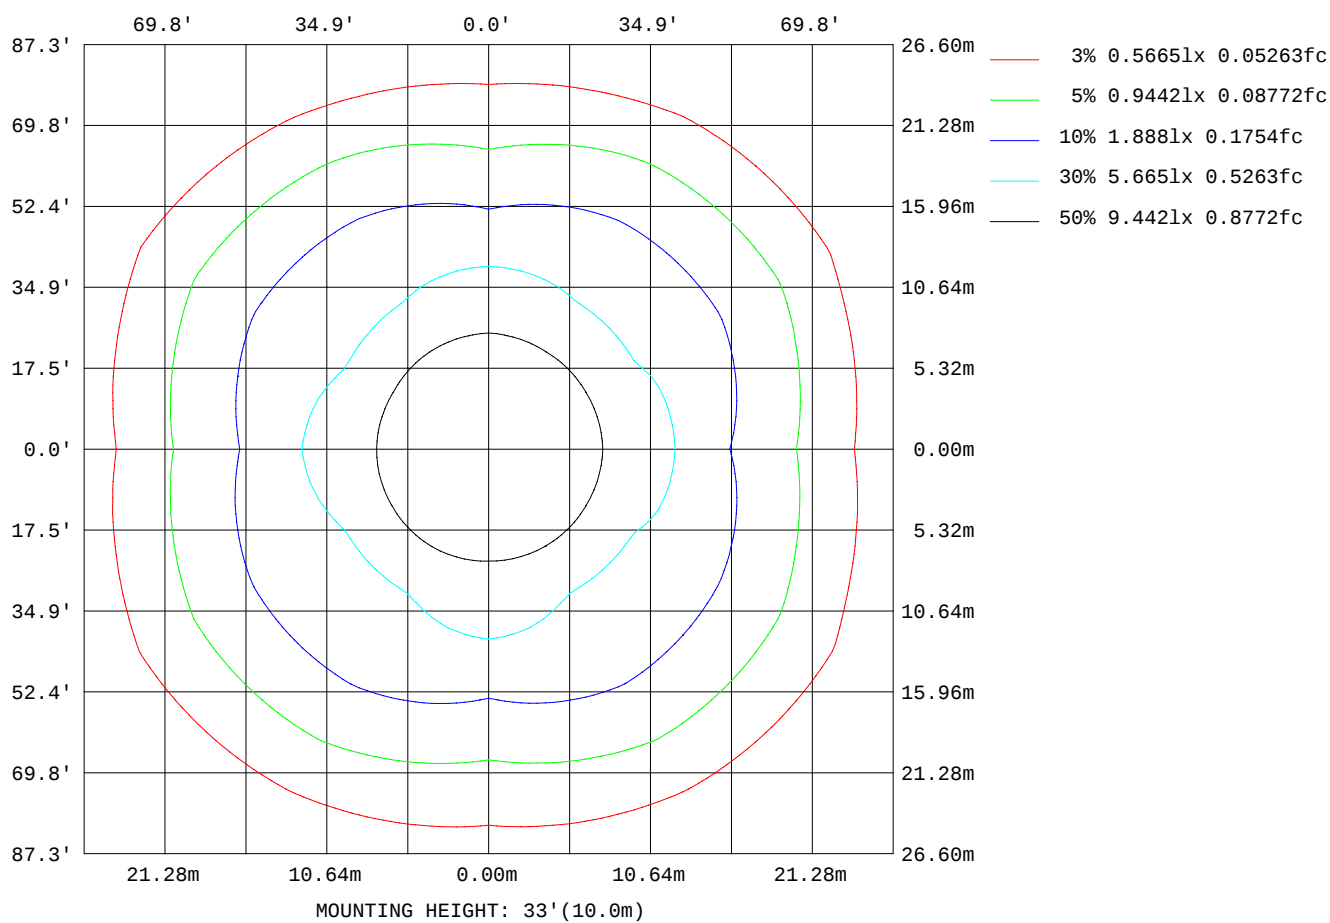

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.4DEG
Operators:DAMIN
Test Date:17 April 2024

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:7.550m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:120.43V I:0.5121A P:61.149W PF:0.9915 Freq:59.98Hz Lamp Flux:8402.78x1 lm		
NAME: TS-60W-W	TYPE:	WEIGHT:
SPEC.: 280*280	DIM.:	SERIAL No.: 20240417002
MFR.:	SUR.: 280*280	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	31931
L_0~180(75)av	19619
L_0~180(85)av	34636
L_90~270(65)av	30849
L_90~270(75)av	20475
L_90~270(85)av	35392
L_45(65)av	42022
L_45(75)av	39950
L_45(85)av	43485

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.4DEG
Operators:DAMIN
Test Date:17 April 2024

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:7.550m [K=1.0000]
Remarks:

Planar Illuminance Curve

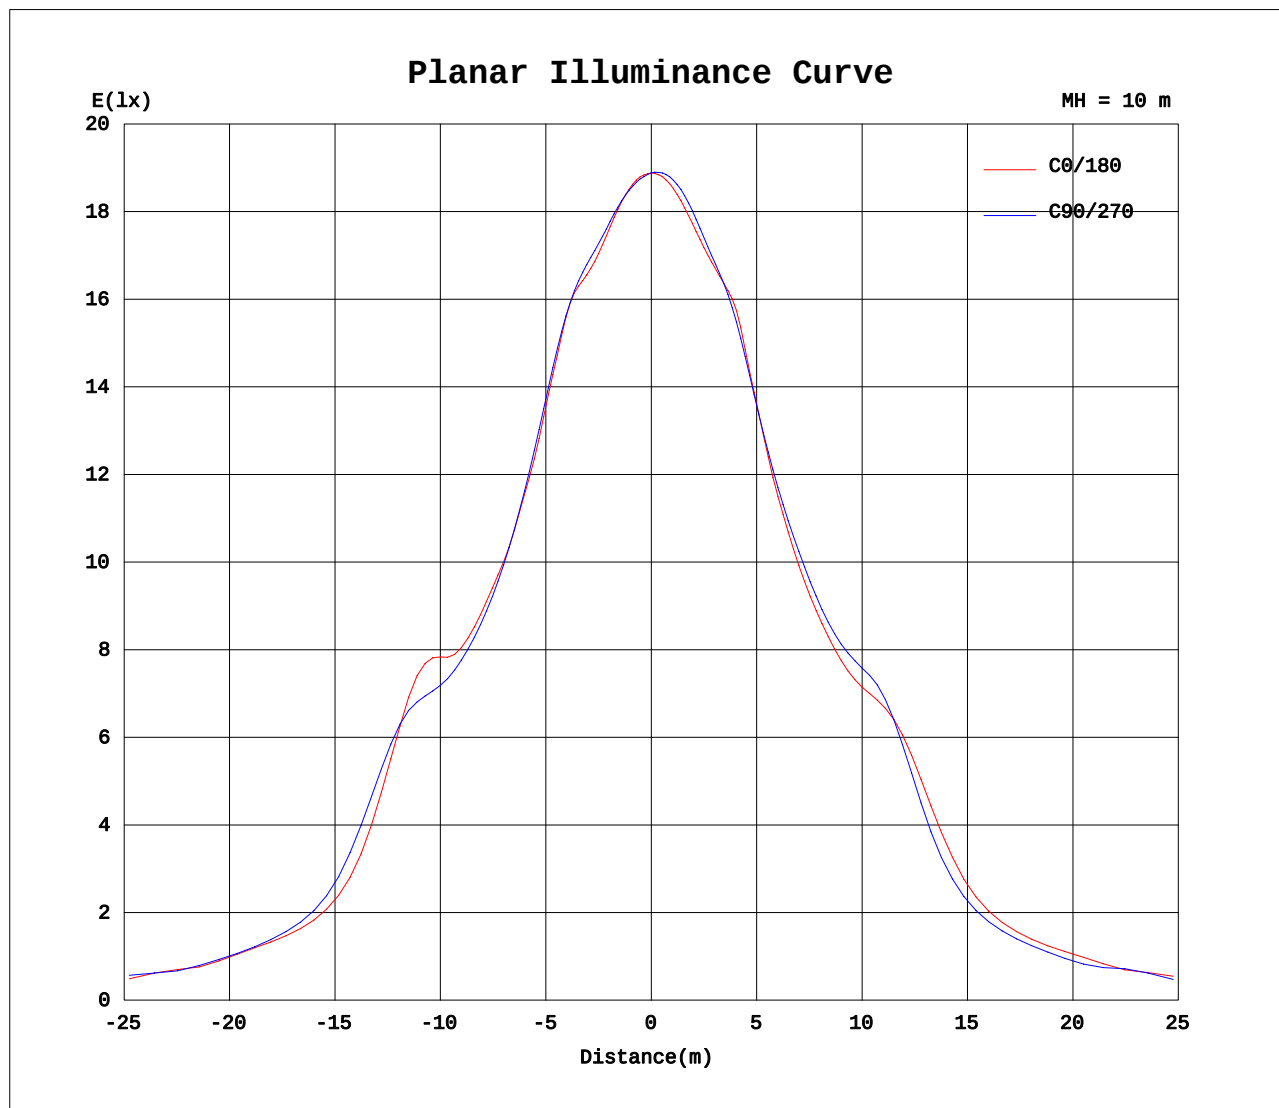

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.4DEG
Operators: DAMIN
Test Date: 17 April 2024

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.00.446
Humidity: 65.0%
Test Distance: 7.550m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.43V I:0.5121A P:61.149W PF:0.9915 Freq:59.98Hz Lamp Flux:8402.78x1 lm																	
NAME: TS-60W-W									TYPE:						WEIGHT:		
SPEC.: 280*280									DIM.:						SERIAL No.: 20240417002		
MFR.:									SUR.: 280*280						Shielding Angle:		

Table--1

UNIT: cd

γ (DEG)	C(DEG)																		
	0	30	60	90	120	150	180	210	240	270	300	330							
0	1888	1889	1889	1889	1889	1889	1888	1889	1889	1889	1889	1889							
5	1884	1882	1881	1880	1880	1881	1885	1891	1898	1901	1900	1893							
10	1870	1865	1874	1879	1875	1870	1876	1890	1901	1905	1903	1888							
15	1872	1847	1870	1899	1874	1866	1888	1889	1892	1909	1888	1873							
20	1947	1871	1890	1952	1901	1892	1952	1912	1898	1941	1884	1891							
25	1920	1934	1910	1940	1928	1938	1928	1946	1914	1917	1893	1945							
30	1839	1894	1882	1860	1907	1896	1837	1890	1890	1864	1872	1897							
35	1821	1827	1831	1808	1843	1827	1805	1806	1850	1863	1835	1833							
40	1895	1786	1782	1843	1790	1775	1847	1764	1824	1920	1818	1792							
45	2217	1811	1785	2033	1788	1782	2022	1776	1841	2144	1851	1818							
50	2356	1976	1901	2374	1899	1888	2281	1898	1984	2198	2000	2019							
55	1488	2135	2144	1786	2129	2014	1731	1999	2002	1469	1955	2113							
60	1179	1576	1695	1254	1715	1689	1254	1653	1535	1125	1503	1587							
65	1009	1349	1364	1054	1374	1417	1107	1412	1274	990	1273	1362							
70	557	1200	1162	765	1175	1267	700	1246	1074	590	1085	1156							
75	377	717	840	422	873	893	419	753	698	409	690	662							
80	293	442	499	320	472	477	322	440	458	316	469	404							
85	230	281	309	246	307	302	244	281	295	237	292	258							
90	127	130	133	137	143	143	132	129	128	129	124	124							
95	83.2	83.7	83.7	88.3	87.7	89.0	93.6	86.3	85.1	92.3	81.8	80.5							
100	61.0	55.9	56.5	64.9	60.1	59.1	68.2	59.2	59.6	65.8	57.6	56.2							
105	44.4	41.6	43.0	47.9	44.9	43.6	49.9	44.3	45.0	48.8	43.1	42.2							
110	34.5	30.8	31.9	37.1	33.4	32.4	38.6	33.0	33.5	38.3	32.5	31.4							
115	27.8	24.9	25.7	29.7	26.3	25.8	30.8	26.8	26.7	30.0	26.5	25.8							
120	22.0	19.3	20.2	23.8	20.5	20.5	25.4	21.4	21.2	24.3	20.7	20.4							
125	17.3	16.6	16.9	18.6	16.7	16.7	20.4	18.0	18.2	19.4	18.1	18.3							
130	16.5	16.8	17.0	16.7	17.1	16.8	17.8	18.0	18.1	17.8	18.0	18.2							
135	16.6	17.0	17.2	17.0	17.4	16.9	17.7	18.1	18.2	17.6	18.0	18.2							
140	16.8	17.2	17.2	17.1	17.5	17.0	17.8	18.1	18.4	17.7	18.0	18.4							
145	17.3	17.6	17.3	17.3	17.7	17.3	18.1	18.1	18.5	18.1	18.2	18.5							
150	18.0	18.0	17.8	17.8	18.0	17.8	18.5	18.4	18.7	18.5	18.4	18.6							
155	18.4	18.4	18.2	18.3	18.4	18.2	18.7	18.6	18.8	18.6	18.6	18.7							
160	18.7	18.8	18.6	18.7	18.7	18.6	18.8	18.7	18.9	18.8	18.7	18.8							
165	18.9	19.0	18.9	19.0	19.0	18.9	19.0	18.7	18.9	18.9	18.8	18.9							
170	19.0	19.0	19.0	19.1	19.1	19.1	19.0	18.9	19.0	18.9	18.9	19.0							
175	18.9	18.9	19.0	18.9	19.0	19.1	19.0	19.0	19.1	19.0	19.0	19.1							
180	18.9	19.0	19.1	18.9	19.0	19.1	18.9	19.0	19.1	18.9	19.0	19.1							

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.4DEG
Operators:DAMIN
Test Date:17 April 2024

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:7.550m [K=1.0000]
Remarks: