


LUMINAIRE PHOTOMETRIC TEST REPORT


Test:U:120.43V I:0.5110A P:61.024W PF:0.9915 Freq:59.98Hz Lamp Flux:8191.98x1 lm		
NAME: TS-60W-WW	TYPE:	WEIGHT:
SPEC.: 280*280	DIM.:	SERIAL No.: 20240417002
MFR.:	SUR.: 280*280	Shielding Angle:

DATA OF LAMP		PHOTOMETRIC DATA Eff: 134.24 lm/W			
MODEL	TS-60W-WW	I _{max} (cd)	2042	S/MH(C0/180)	1.55
NOMINAL POWER(W)	60	LOR(%)	100.0	S/MH(C90/270)	1.55
RATED VOLTAGE(V)	120	TOTAL FLUX(lm)	8192.0	η UP, DN(C0-180)	1.3, 49.1
NOMINAL FLUX(lm)	8191.98	CIE CLASS	DIRECT	η UP, DN(C180-360)	1.3, 48.2
LAMPS INSIDE	1	η up(%)	2.7	CIBSE SHR NOM	1.50
TEST VOLTAGE(V)	120	η down(%)	97.3	CIBSE SHR MAX	1.55

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

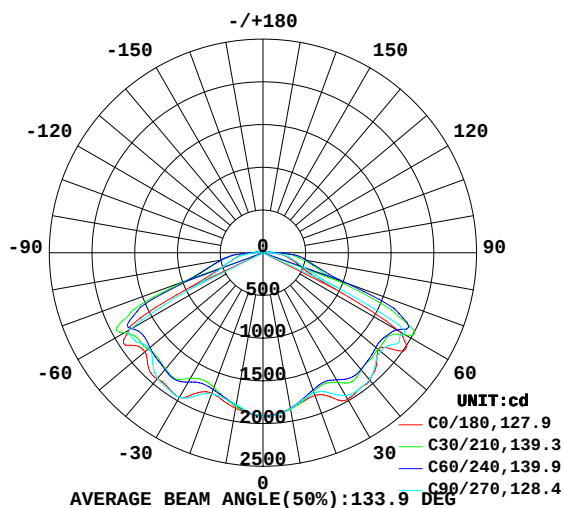

C0 PLANE ISOLUX DIAGRAM (UNIT:lx)

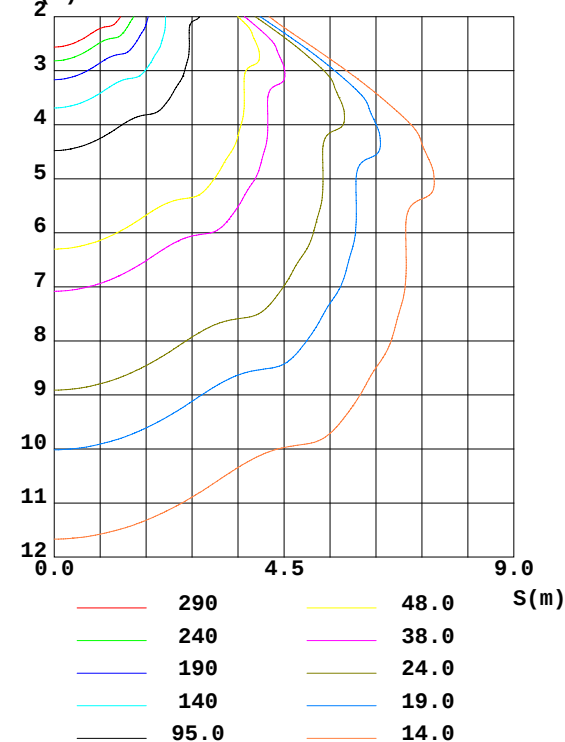

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.4DEG
Operators:DAMIN
Test Date:17 April 2024

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:7.550m [K=1.0000]
Remarks:

ZONAL FLUX DIAGRAM

ZONAL FLUX DIAGRAM:


γ	C0	C45	C90	C135	C180	C225	C270	C315	γ	Φ zone	Φ total	%lum, lamp
10	1853	1853	1850	1856	1849	1819	1809	1823	0- 10	178.7	178.7	2.18, 2.18
20	1778	1720	1749	1718	1751	1693	1756	1701	10- 20	502.3	681.0	8.31, 8.31
30	1981	1735	1930	1720	1957	1723	1955	1748	20- 30	807.9	1489	18.2, 18.2
40	1945	1789	1938	1787	1927	1780	1920	1791	30- 40	1157	2646	32.3, 32.3
50	1761	1741	1797	1742	1806	1741	1739	1745	40- 50	1388	4034	49.2, 49.2
60	1861	1868	1898	1827	1802	1824	1801	1893	50- 60	1610	5644	68.9, 68.9
70	466.2	939.3	521.5	1071	522.0	929.7	512.7	859.6	60- 70	1398	7042	86, 86
80	294.7	497.1	313.0	511.4	314.3	492.9	304.8	478.4	70- 80	609.5	7651	93.4, 93.4
90	90.79	155.9	102.6	165.8	103.7	146.7	96.28	139.2	80- 90	322.5	7974	97.3, 97.3
100	50.47	52.24	52.95	56.12	55.77	56.20	52.32	52.71	90-100	91.83	8066	98.5, 98.5
110	31.96	30.42	34.41	31.72	35.40	32.43	34.13	31.21	100-110	44.13	8110	99, 99
120	21.01	19.52	22.82	20.34	24.36	20.77	23.15	20.14	110-120	26.35	8136	99.3, 99.3
130	15.94	16.46	16.04	16.52	17.24	17.80	17.28	17.76	120-130	16.29	8152	99.5, 99.5
140	16.52	16.86	16.68	16.92	17.57	17.89	17.60	17.90	130-140	13.21	8166	99.7, 99.7
150	17.53	17.56	17.58	17.62	18.02	18.09	18.07	18.12	140-150	11.03	8177	99.8, 99.8
160	18.23	18.09	18.25	18.15	18.30	18.24	18.29	18.30	150-160	8.346	8185	99.9, 99.9
170	18.34	18.37	18.40	18.48	18.28	18.34	18.30	18.40	160-170	5.185	8190	100, 100
180	18.43	18.46	18.49	18.51	18.42	18.46	18.49	18.51	170-180	1.758	8192	100, 100
DEG	LUMINOUS INTENSITY:cd									UNIT:lm		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature: 25.4DEG
 Operators: DAMIN
 Test Date: 17 April 2024

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System: EVERFINE G0-2000A_V1 SYSTEM V2.00.446
 Humidity: 65.0%
 Test Distance: 7.550m [K=1.0000]
 Remarks:

LUMINANCE LIMITATION CURVES

Test:U:120.43V I:0.5110A P:61.024W PF:0.9915 Freq:59.98Hz Lamp Flux:8191.98x1 lm		
NAME: TS-60W-WW	TYPE:	WEIGHT:
SPEC.: 280*280	DIM.:	SERIAL No.: 20240417002
MFR.:	SUR.: 280*280	Shielding Angle:

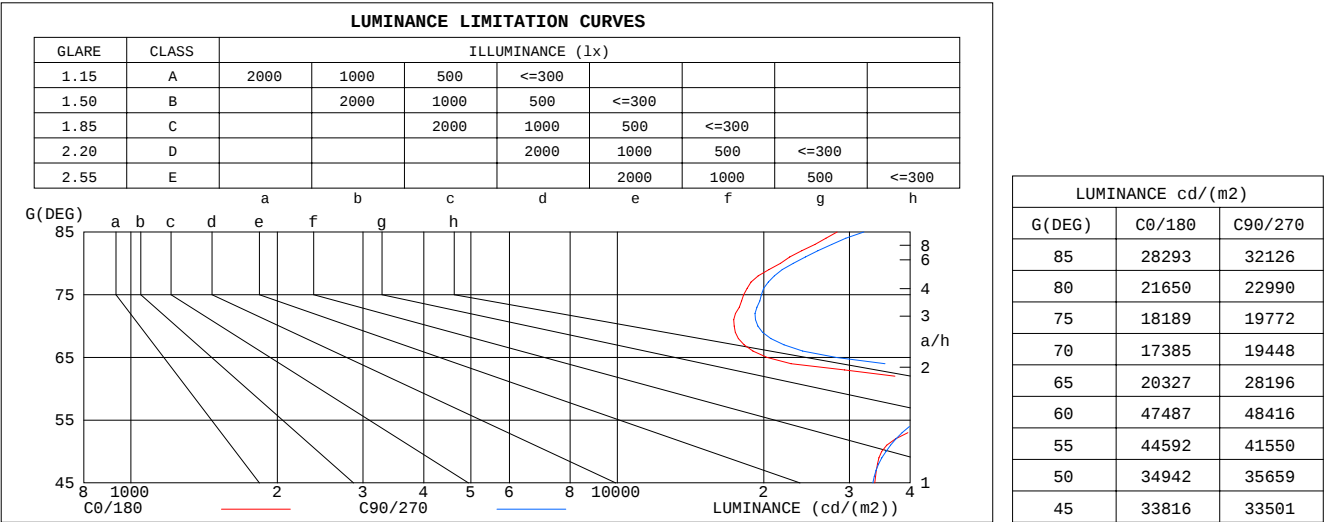


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.4DEG
Operators:DAMIN
Test Date:17 April 2024

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:7.550m [K=1.0000]
Remarks:

CU AND LUMINAIRE BUDGETARY ESTIMATE DIAGRAM

Test:U:120.43V I:0.5110A P:61.024W PF:0.9915 Freq:59.98Hz Lamp Flux:8191.98x1 lm		
NAME: TS-60W-WW	TYPE:	WEIGHT:
SPEC.: 280*280	DIM.:	SERIAL No.: 20240417002
MFR.:	SUR.: 280*280	Shielding Angle:

ρcc	80%			70%			50%			30%			10%			0
ρw	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρfc	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio															

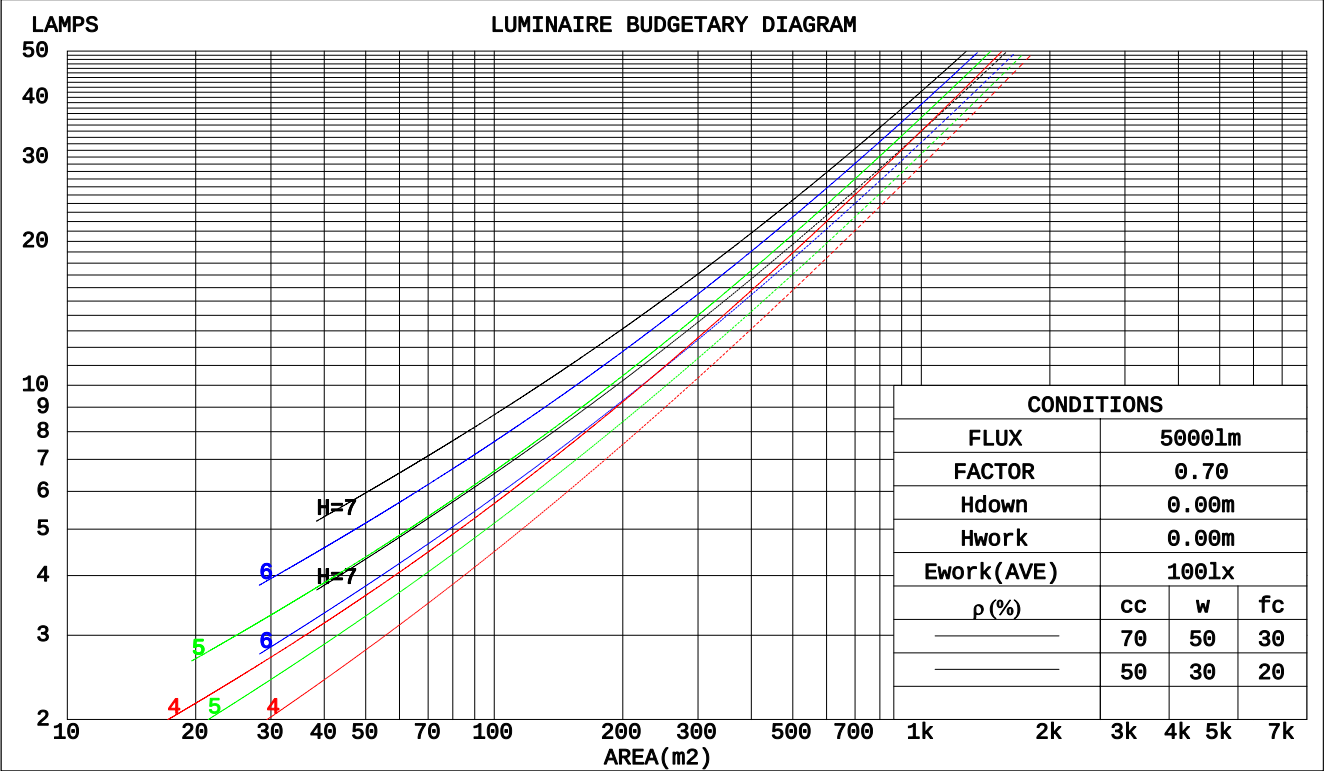

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.4DEG
Operators:DAMIN
Test Date:17 April 2024

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:7.550m [K=1.0000]
Remarks:

WEC AND CCEC

Test:U:120.43V I:0.5110A P:61.024W PF:0.9915 Freq:59.98Hz Lamp Flux:8191.98x1 lm					
NAME: TS-60W-WW			TYPE:		WEIGHT:
SPEC.: 280*280			DIM.:		SERIAL No.: 20240417002
MFR.:			SUR.: 280*280		Shielding Angle:

ρ_{cc}	80%			70%			50%			30%			10%			0	
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0	
ρ_{fc}	20%			20%			20%			20%			20%			0	
RCR	RCR:Room Cavity Ratio						Wall Exitance Coefficients(WEC)										
0.0																	
1.0	.354	.201	.064	.346	.197	.063	.331	.190	.061	.317	.183	.059	.305	.177	.057		
2.0	.326	.179	.055	.319	.175	.054	.305	.170	.053	.293	.164	.051	.281	.159	.050		
3.0	.298	.159	.047	.292	.156	.047	.280	.151	.046	.268	.147	.045	.258	.143	.044		
4.0	.272	.142	.042	.267	.140	.041	.256	.136	.041	.246	.132	.040	.237	.129	.039		
5.0	.250	.127	.037	.245	.126	.037	.235	.122	.036	.226	.119	.036	.218	.116	.035		
6.0	.230	.115	.033	.226	.114	.033	.217	.111	.032	.209	.109	.032	.201	.106	.031		
7.0	.213	.105	.030	.209	.104	.030	.201	.102	.029	.194	.099	.029	.187	.097	.029		
8.0	.198	.097	.027	.194	.095	.027	.187	.093	.027	.180	.091	.026	.174	.089	.026		
9.0	.184	.089	.025	.181	.088	.025	.175	.086	.024	.169	.085	.024	.163	.083	.024		
10.0	.172	.083	.023	.169	.082	.023	.164	.080	.023	.158	.079	.022	.153	.077	.022		

ρ_{cc}	80%			70%			50%			30%			10%			0
ρ_w	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0
ρ_{fc}	20%			20%			20%			20%			20%			0
RCR	RCR:Room Cavity Ratio						Ceiling Cavity Exitance Coefficients(CCEC)									
0.0	.211	.211	.211	.180	.180	.180	.123	.123	.123	.071	.071	.071	.023	.023	.023	
1.0	.204	.176	.151	.174	.151	.130	.119	.104	.090	.069	.060	.052	.022	.019	.017	
2.0	.197	.152	.114	.169	.131	.099	.116	.091	.069	.067	.053	.040	.021	.017	.013	
3.0	.191	.135	.091	.163	.117	.079	.112	.081	.055	.065	.047	.033	.021	.015	.011	
4.0	.183	.122	.076	.157	.106	.066	.108	.074	.046	.063	.043	.027	.020	.014	.009	
5.0	.176	.112	.065	.151	.097	.057	.104	.068	.040	.060	.040	.024	.019	.013	.008	
6.0	.169	.104	.058	.145	.090	.050	.100	.063	.036	.058	.037	.021	.019	.012	.007	
7.0	.162	.097	.052	.139	.084	.046	.096	.059	.032	.056	.035	.019	.018	.011	.006	
8.0	.155	.092	.048	.133	.079	.042	.092	.056	.030	.054	.033	.018	.017	.011	.006	
9.0	.148	.087	.045	.128	.075	.039	.089	.053	.028	.052	.031	.017	.017	.010	.006	
10.0	.142	.082	.043	.123	.072	.037	.085	.050	.026	.050	.030	.016	.016	.010	.005	

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.4DEG
Operators:DAMIN
Test Date:17 April 2024

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:7.550m [K=1.0000]
Remarks:

UGR(Unified Glare Rating) Table

Test:U:120.43V I:0.5110A P:61.024W PF:0.9915 Freq:59.98Hz Lamp Flux:8191.98x1 lm										
NAME: TS-60W-WW					TYPE:			WEIGHT:		
SPEC.: 280*280					DIM.:			SERIAL No.: 20240417002		
MFR.:					SUR.: 280*280			Shielding Angle:		
ceiling/cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
Room dimensions	Viewed crosswise					Viewed endwise				
x = 2H y = 2H	26.6	28.2	26.9	28.5	28.8	26.7	28.4	27.1	28.6	28.9
3H	27.4	28.9	27.7	29.2	29.5	27.8	29.3	28.1	29.5	29.9
4H	27.6	29.0	28.0	29.4	29.7	28.0	29.4	28.4	29.7	30.1
6H	27.9	29.2	28.2	29.5	29.9	28.3	29.6	28.6	29.9	30.3
8H	28.0	29.3	28.4	29.7	30.0	28.4	29.7	28.8	30.1	30.4
12H	28.2	29.4	28.6	29.8	30.2	28.6	29.9	29.0	30.2	30.6
4H 2H	27.7	29.1	28.0	29.4	29.7	27.7	29.2	28.1	29.5	29.8
3H	28.6	29.8	29.0	30.2	30.5	28.9	30.2	29.3	30.5	30.9
4H	28.9	30.1	29.3	30.4	30.8	29.3	30.4	29.7	30.8	31.2
6H	29.3	30.3	29.7	30.7	31.2	29.7	30.7	30.1	31.1	31.6
8H	29.5	30.5	30.0	30.9	31.3	29.9	30.9	30.4	31.3	31.8
12H	29.8	30.6	30.2	31.1	31.5	30.2	31.1	30.7	31.5	32.0
8H 4H	29.2	30.2	29.7	30.6	31.0	29.5	30.5	30.0	30.9	31.4
6H	29.9	30.7	30.4	31.1	31.6	30.2	31.0	30.7	31.5	32.0
8H	30.3	31.0	30.8	31.5	32.0	30.7	31.4	31.2	31.9	32.4
12H	30.7	31.3	31.2	31.8	32.3	31.2	31.8	31.7	32.3	32.8
12H 4H	29.3	30.2	29.7	30.6	31.1	29.6	30.5	30.0	30.9	31.4
6H	30.0	30.8	30.5	31.2	31.7	30.4	31.1	30.9	31.6	32.1
8H	30.5	31.2	31.1	31.6	32.2	30.9	31.6	31.5	32.0	32.6
Variations with the observer position at spacings(CIE Pub.117):										
S = 1.0H	+ 0.2 / - 0.2					+ 0.3 / - 0.3				
1.5H	+ 0.4 / - 0.7					+ 0.3 / - 0.6				
2.0H	+ 1.1 / - 1.3					+ 1.0 / - 1.2				

CIE Pub.117, 8192 lm Total Lamp Luminous Flux Corrected ($8\log(F/F_0) = 7.3$)
Area: 0.0784 m²

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.4DEG
Operators:DAMIN
Test Date:17 April 2024

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 γ Test System:EVERFINE G0-2000A_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:7.550m [K=1.0000]
Remarks:

UTILIZATION FACTORS TABLE

Test:U:120.43V I:0.5110A P:61.024W PF:0.9915 Freq:59.98Hz Lamp Flux:8191.98x1 lm		
NAME: TS-60W-WW	TYPE:	WEIGHT:
SPEC.: 280*280	DIM.:	SERIAL No.: 20240417002
MFR.:	SUR.: 280*280	Shielding Angle:


REFLECTANCE										
Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5	0
Walls	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3	0
Working plane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0
ROOM INDEX	UTILIZATION FACTORS(PERCENT) $k(RI) \times RCR = 5$									
$k = 0.60$	50	37	30	49	37	30	48	36	29	22
0.80	60	47	39	59	47	39	57	46	38	31
1.00	69	57	48	68	56	48	65	57	47	39
1.25	77	65	56	75	64	56	72	62	55	47
1.50	82	71	63	80	70	62	77	68	61	52
2.00	90	80	73	88	79	72	84	76	70	61
2.50	95	86	78	92	84	77	88	81	75	66
3.00	98	90	84	96	89	83	91	85	80	71
4.00	103	96	91	100	94	89	96	91	86	76
5.00	106	100	95	103	98	94	98	94	90	80
ROOM INDEX	UF(total)									Direct
According to DIN EN 13032-2 2004			Suspended					SHRNOM = 1.25		

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.4DEG
 Operators:DAMIN
 Test Date:17 April 2024

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 γ Test System:EVERFINE G0-2000A_V1 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:7.550m [K=1.0000]
 Remarks:

ISOCANDELA DIAGRAM

Test:U:120.43V I:0.5110A P:61.024W PF:0.9915 Freq:59.98Hz Lamp Flux:8191.98x1 lm		
NAME: TS-60W-WW	TYPE:	WEIGHT:
SPEC.: 280*280	DIM.:	SERIAL No.: 20240417002
MFR.:	SUR.: 280*280	Shielding Angle:

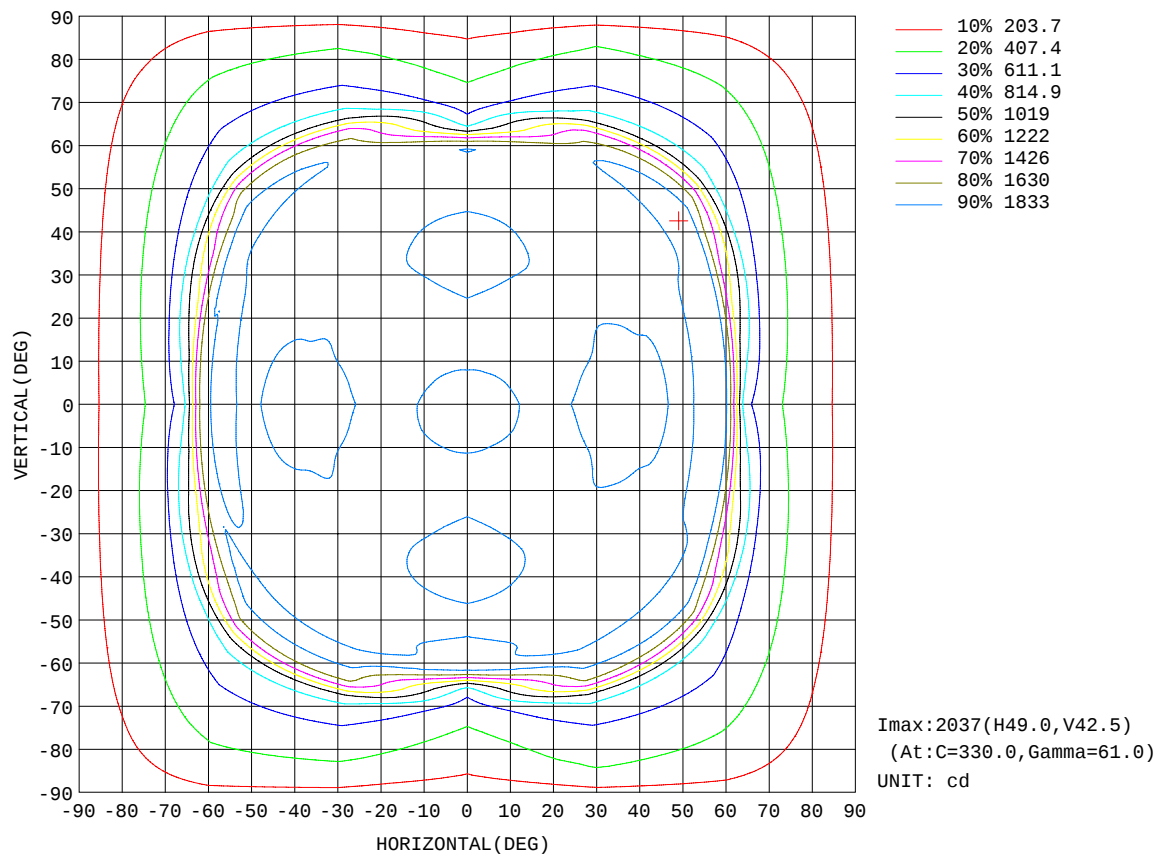


C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.4DEG
Operators: DAMIN
Test Date: 17 April 2024

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.00.446
Humidity: 65.0%
Test Distance: 7.550m [K=1.0000]
Remarks:

AAI CURVES

Test:U:120.43V I:0.5110A P:61.024W PF:0.9915 Freq:59.98Hz Lamp Flux:8191.98x1 lm		
NAME: TS-60W-WW	TYPE:	WEIGHT:
SPEC.: 280*280	DIM.:	SERIAL No.: 20240417002
MFR.:	SUR.: 280*280	Shielding Angle:

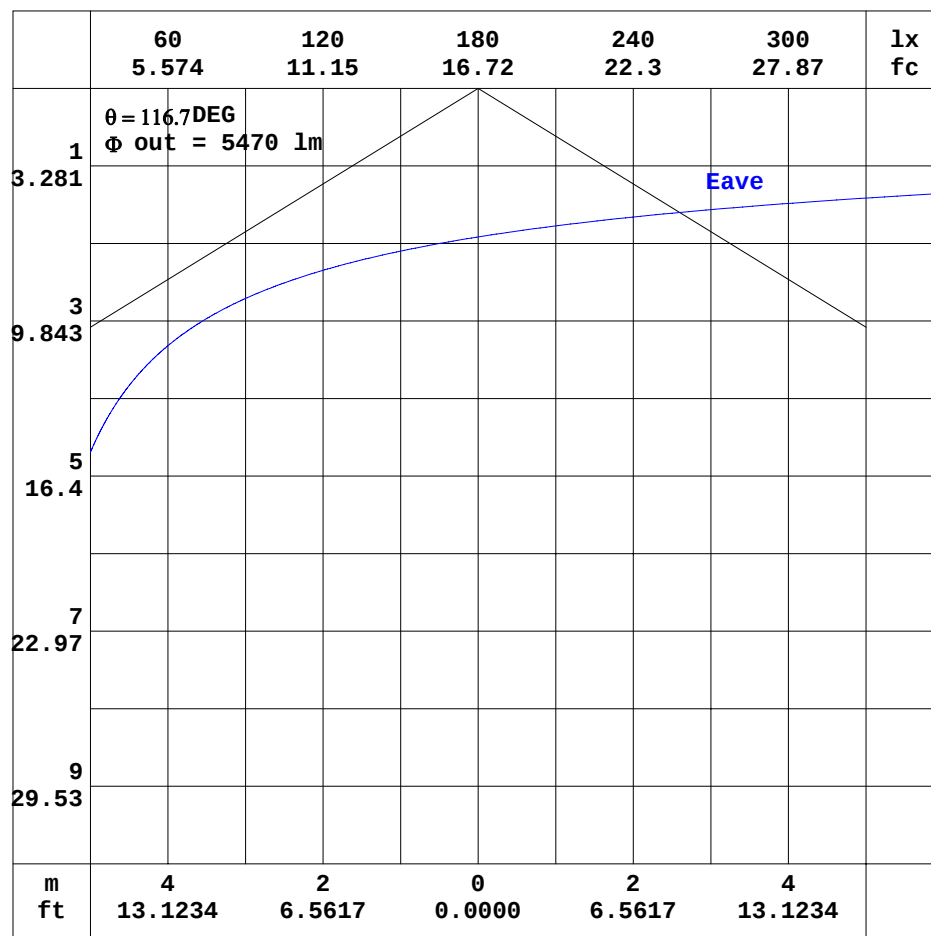


Note: The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature: 25.4DEG
Operators: DAMIN
Test Date: 17 April 2024

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System: EVERFINE G0-2000A_V1 SYSTEM V2.00.446
Humidity: 65.0%
Test Distance: 7.550m [K=1.0000]
Remarks:

ISOLUX DIAGRAM

Test:U:120.43V I:0.5110A P:61.024W PF:0.9915 Freq:59.98Hz Lamp Flux:8191.98x1 lm		
NAME: TS-60W-WW	TYPE:	WEIGHT:
SPEC.: 280*280	DIM.:	SERIAL No.: 20240417002
MFR.:	SUR.: 280*280	Shielding Angle:

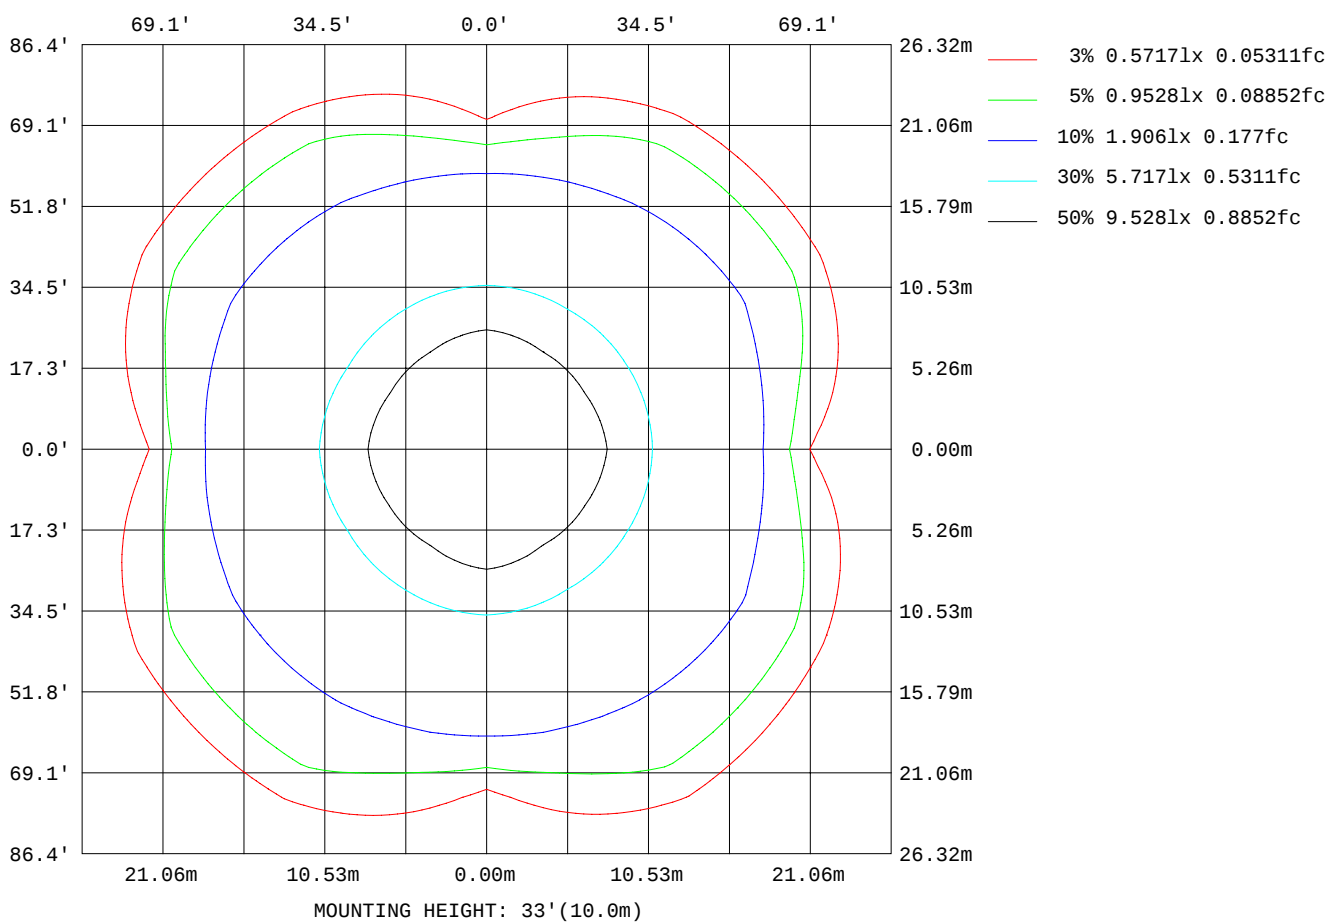

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.4DEG
Operators:DAMIN
Test Date:17 April 2024

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:7.550m [K=1.0000]
Remarks:

LED Avg.L Report

Test:U:120.43V I:0.5110A P:61.024W PF:0.9915 Freq:59.98Hz Lamp Flux:8191.98x1 lm		
NAME: TS-60W-WW	TYPE:	WEIGHT:
SPEC.: 280*280	DIM.:	SERIAL No.: 20240417002
MFR.:	SUR.: 280*280	Shielding Angle:


AvgL	cd/m2
L_0~180(65)av	23183
L_0~180(75)av	18935
L_0~180(85)av	29688
L_90~270(65)av	25507
L_90~270(75)av	19680
L_90~270(85)av	30348
L_45(65)av	55518
L_45(75)av	33654
L_45(85)av	56600

Standard: GB/T 29293-2012

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.4DEG
Operators:DAMIN
Test Date:17 April 2024

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:7.550m [K=1.0000]
Remarks:

Planar Illuminance Curve

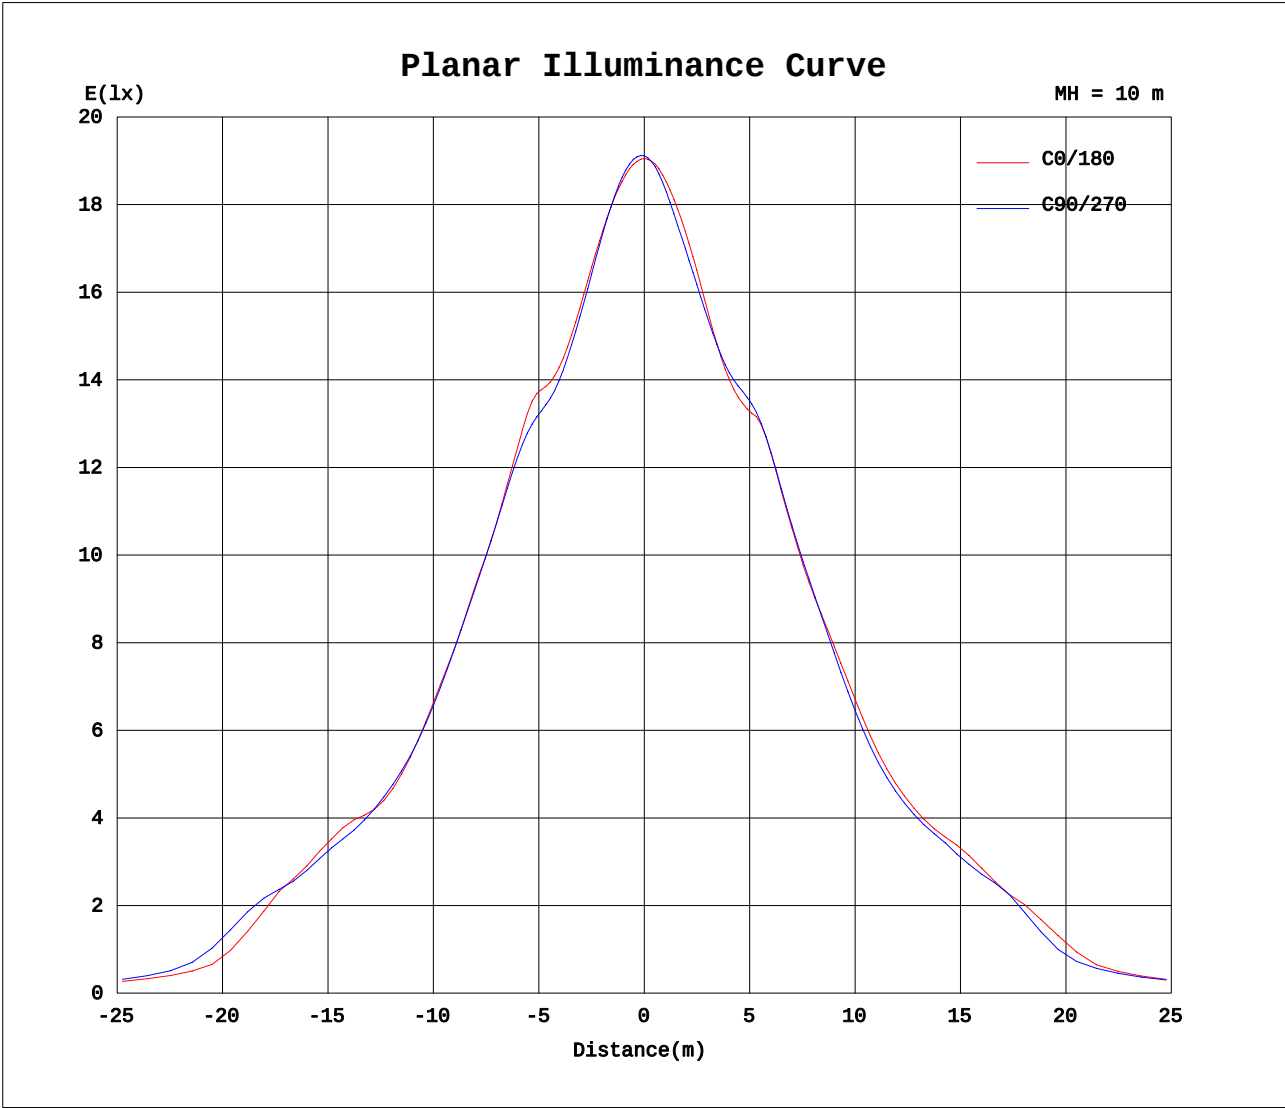

C Range: 0 - 360DEG
C Interval: 30.0DEG
Test Speed: HIGH
Temperature:25.4DEG
Operators:DAMIN
Test Date:17 April 2024

γ Range: 0 - 180DEG
γ Interval: 1.0DEG
Test System:EVERFINE G0-2000A_V1 SYSTEM V2.00.446
Humidity:65.0%
Test Distance:7.550m [K=1.0000]
Remarks:

LUMINOUS DISTRIBUTION INTENSITY DATA

Test:U:120.43V I:0.5110A P:61.024W PF:0.9915 Freq:59.98Hz Lamp Flux:8191.98x1 lm																	
NAME: TS-60W-WW									TYPE:						WEIGHT:		
SPEC.: 280*280									DIM.:						SERIAL No.: 20240417002		
MFR.:									SUR.: 280*280						Shielding Angle:		

Table--1

UNIT: cd

C (DEG) γ (DEG)	0	30	60	90	120	150	180	210	240	270	300	330						
0	1906	1909	1910	1912	1913	1914	1906	1909	1910	1912	1913	1914						
5	1890	1897	1899	1901	1901	1902	1889	1882	1877	1872	1878	1888						
10	1853	1858	1849	1850	1853	1860	1849	1827	1812	1809	1812	1834						
15	1806	1798	1778	1785	1781	1795	1794	1754	1751	1764	1750	1764						
20	1778	1729	1711	1749	1716	1721	1751	1681	1704	1756	1704	1697						
25	1861	1694	1674	1805	1680	1676	1809	1646	1690	1846	1695	1670						
30	1981	1753	1718	1930	1721	1718	1957	1698	1747	1955	1757	1740						
35	1954	1832	1786	1953	1792	1814	1932	1797	1809	1943	1813	1824						
40	1945	1793	1785	1938	1794	1779	1927	1775	1785	1920	1784	1797						
45	1875	1774	1757	1857	1768	1743	1898	1741	1757	1825	1757	1787						
50	1761	1756	1725	1797	1743	1741	1806	1756	1727	1739	1720	1770						
55	2005	1756	1730	1868	1737	1768	1888	1775	1702	1818	1716	1783						
60	1861	1928	1809	1898	1814	1841	1802	1873	1775	1801	1786	2000						
65	673	1736	1808	934	1789	1780	863	1732	1625	756	1602	1726						
70	466	850	1029	521	1063	1080	522	958	901	513	863	856						
75	369	632	666	401	668	687	399	655	645	397	640	611						
80	295	473	522	313	506	516	314	486	500	305	504	453						
85	193	358	411	220	378	384	212	349	365	195	366	322						
90	90.8	150	162	103	166	166	104	146	147	96.3	144	134						
95	66.4	81.8	83.6	71.5	87.5	88.4	75.4	85.4	84.1	70.8	80.0	76.4						
100	50.5	51.9	52.6	52.9	56.7	55.6	55.8	56.2	56.2	52.3	53.5	51.9						
105	38.8	38.9	40.0	42.1	42.2	40.9	42.8	41.9	42.3	41.4	40.5	39.4						
110	32.0	29.9	30.9	34.4	32.3	31.1	35.4	32.2	32.6	34.1	31.4	31.0						
115	26.3	24.3	25.3	28.3	25.8	25.3	29.5	26.3	26.2	28.7	25.8	25.3						
120	21.0	19.1	20.0	22.8	20.3	20.4	24.4	20.9	20.6	23.2	20.3	20.0						
125	17.0	16.5	16.7	18.3	16.7	16.7	19.5	17.9	17.9	18.6	18.0	18.0						
130	15.9	16.3	16.6	16.0	16.6	16.5	17.2	17.8	17.8	17.3	17.6	17.9						
135	16.0	16.5	16.6	16.2	16.8	16.5	17.3	17.7	17.9	17.3	17.7	17.9						
140	16.5	16.9	16.8	16.7	17.1	16.7	17.6	17.7	18.1	17.6	17.8	18.0						
145	17.1	17.3	17.1	17.2	17.5	17.1	17.8	17.8	18.2	17.9	17.9	18.2						
150	17.5	17.7	17.4	17.6	17.8	17.4	18.0	17.9	18.3	18.1	18.0	18.3						
155	17.9	18.0	17.7	17.9	18.0	17.8	18.3	18.0	18.4	18.3	18.1	18.4						
160	18.2	18.2	18.0	18.2	18.2	18.1	18.3	18.1	18.4	18.3	18.2	18.4						
165	18.3	18.4	18.2	18.4	18.4	18.3	18.2	18.1	18.4	18.3	18.2	18.4						
170	18.3	18.4	18.3	18.4	18.5	18.4	18.3	18.2	18.4	18.3	18.3	18.5						
175	18.4	18.4	18.4	18.4	18.4	18.5	18.4	18.4	18.5	18.4	18.4	18.5						
180	18.4	18.4	18.5	18.5	18.5	18.5	18.4	18.4	18.5	18.5	18.5	18.6						

C Range: 0 - 360DEG
 C Interval: 30.0DEG
 Test Speed: HIGH
 Temperature:25.4DEG
 Operators:DAMIN
 Test Date:17 April 2024

γ Range: 0 - 180DEG
 γ Interval: 1.0DEG
 Test System:EVERFINE G0-2000A_V1 SYSTEM V2.00.446
 Humidity:65.0%
 Test Distance:7.550m [K=1.0000]
 Remarks: