



Hazardous / Explosion Proof LED Luminaires



Date:..... Location:

Product:.....Project:.....

Quantity:..... Catalog#

FEATURES

- Hazardous location explosion proof design, IP68 rated
- Class I Division 2 Group A, B, C, D Easy installation.
- Corrosion and rust proof, PCB Heat Index 2.0
- 50,000 hours lifetime,DLC PREMIUM

SUITABLE APPLICATIONS

Application in Zone1 & Zone2 gaseous environment, and Zone21 & Zone22 dust environment

- Gas station
- Petroleum
- Chemical industries,
- Coal mine
- Military Port
- Marine

CONSTRUCTION:

Heavy die-cast aluminum alloy housing with Grey Powder-coated finish. Tempered Glass lens.

ELECTRICAL:

Available as 120-277V input. -20°C to 50°C.

OPTICAL SYSTEM:

Lumileds 3030LED chips. High quality tempered glass optics.120° beam angle.

INSTALLATION&MOUNTING:

Wall U bracket or conduit thread pendant Mounting, thread pipe available upon request.

WARRANTY:

5-year limited warranty. Actual performance may differ as a result of end-user environment and application.

PERFORMANCE

Model NO	Power Factor	Wattage	Voltage/CurrentInput		Light Efficiency	Kelvin Options
			120V	277V		
CES-J100W	0.9	100W	0.83A	0.36A	130LM/W	5000K
CES-J200W	0.9	200W	1.66A	0.72A	130LM/W	5000K

Hazardous / Explosion Proof LED Luminaires

Electric Characteristic

Specification/Model	CES-J100W	CES-J200W
LED DRIVER	UL listed MEANWELLHLG Brand	
Input power	100W	200W
Lumens output	13000LM	26000LM
Efficiency	130LM/W	130LM/W
CRI	>72	>72
Color Temperature	5000K	5000K
Input voltage	120-277V/AC	120-277V/AC
Light distribution type	120D	120D
Working temperature	-20+45℃	-20+45℃
Junction temperature	<75℃	<75℃
lamps efficiency	≥90%	≥90%
Certificate	UL CUL DLC	UL CUL DLC
Equivalent	200-400WMH/HPS	400-600WMH/HPS

PRODUCT ORDERING GUIDE

CES-J100W

1

2



CES - J100W

☒ CES LEDSION

☒ J100W Power100W


☒ J200W Power200W

DIMENSION

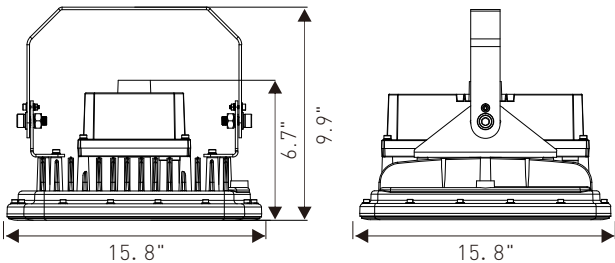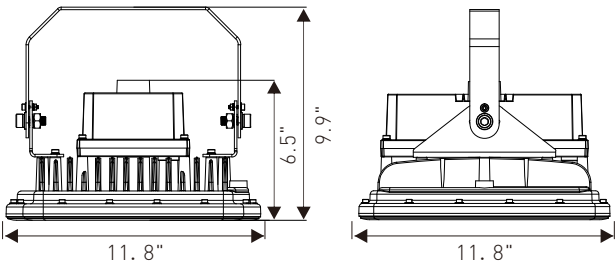

DISTRIBUTION DIAGRAM

CES-J100W




AVERAGE BEAM ANGLE(50%): 111.1°

UNIT:CD

Test Number:LSCES-J100W
Lumens:13000LM
Test Number:100W
Test Number:5000K
UNIT:CD
C0/180,112.9
C30/210,111.5
C60/240,109.7
C90/270,110.1

CES-J200W



AVERAGE BEAM ANGLE(50%): 112.9°

UNIT:CD

Test Number:LSCES-J200W
Lumens:26000LM
Test Number:200W
Test Number:5000K
UNIT:CD
C0/180,114.5
C30/210,112.2
C60/240,111.6
C90/270,113.3