



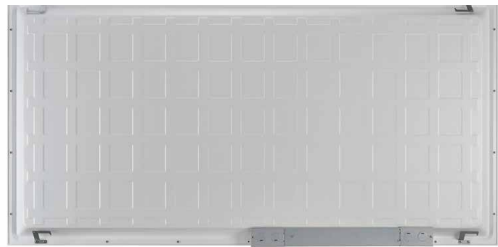

5 Watts&5 CCT Tunable LED Panel Light

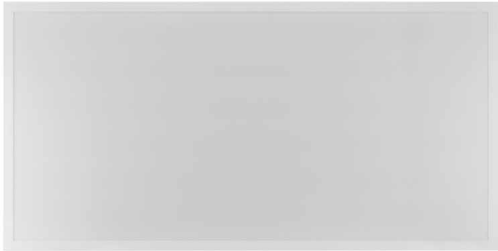

CONSTRUCTION:

Quality white Aluminum heatsink and high transmission PC cover.

OPTICAL SYSTEM:

High brightness SMD LED chips as backlit lighting solution.

WARRANTY:

5-year limited warranty. Actual performance may differ as a result of end-user environment and application.

PERFORMANCE

Model NO	SIZE	Wattage	Voltage	Light Efficiency	Kelvin Options
LS-PL22-M40W-CCT	2X2	15/20/25/30/40W	100-277V	125LM/W	35K/40K/50K/57K/65K
LS-PL14-M40W-CCT	1X4	15/20/25/30/40W	100-277V	125LM/W	35K/40K/50K/57K/65K
LS-PL24-M72W-CCT	2X4	30/40/50/60/72W	100-277V	125LM/W	35K/40K/50K/57K/65K

Date:..... Location:

Product:..... Project:.....

Quantity:..... Catalog#

FEATURES

- 5 Watts 5CCT up to 72W 65K highest 9000lm adjustable.
- Easy install by Recessed or surface mounts.
- Built-in junction box Fits standard T-grid ceilings
- Optical lenses over LED chip, pc cover never yellow over time.
- 50,000hours Life time. DLC PREMIUM

SUITABLE APPLICATIONS

- Office Lighting
- Meeting room lighting
- Store lighting
- Restaurant lighting

ELECTRICAL:

Available as 100-277V input. -25°C to45°C.

INSTALLATION&MOUNTING:

Suspended Ceiling Mounting/ Frame Mounting

➤ Electric Characteristic

Specification/Model	LS-PL22-M40W-CCT	LS-PL14-M40W-CCT	LS-PL24-M72W-CCT
LED Driver	UL listed XIEZHEN Brand 0-10 dimmable		
Input power tunable	15/20/25/30/40W	15/20/25/30/40W	30/40/50/60/72W
Lumens output	1875/2500/3125/3750/5000LM	1875/2500/3125/3750/5000LM	3750/5000/6250/7500/9000LM
Efficiency	125LM/W	125LM/W	125LM/W
CRI	>80	>80	>80
Color Temperature	35/40/50/57/65K tunable	35/40/50/57/65K tunable	35/40/50/57/65K tunable
Input voltage	120-277V/AC	120-277V/AC	120-277V/AC
Light distribution type	110D	110D	110D
Working temperature	-25+45℃	-25+45℃	-25+45℃
Junction temperature	<75℃	<75℃	<75℃
lamps efficiency	≥90%	≥90%	≥90%
Certificate	ETL DLC	ETL DLC	ETL DLC
Equivalent	36-110W MH/HPS	36-110W MH/HPS	56-150W MH/HPS

➤ Electric Characteristic

Built in EM Panel



LED BACK-LIT PANEL LIGHT

Model: LS-PL24-M72W-CCT

POWER: (Default with √)
☐ 30W ☐ 40W ☒ 50W ☐ 60W ☐ 72W

CCT: (Default with √)
☐ 3500K ☐ 4000K ☒ 5000K ☐ 5700K ☐ 6500K


VOLTAGE: AC120-277V 50/60Hz

Model: LS-PL22-M40W-CCT-VL


POWER: (Default with √)
☐ 15W ☐ 20W ☐ 25W ☐ 30W ☒ 40W

CCT: (Default with √)
☐ 3500K ☐ 4000K ☒ 5000K ☐ 5700K ☐ 6500K

VOLTAGE: AC120-277V 50/60Hz

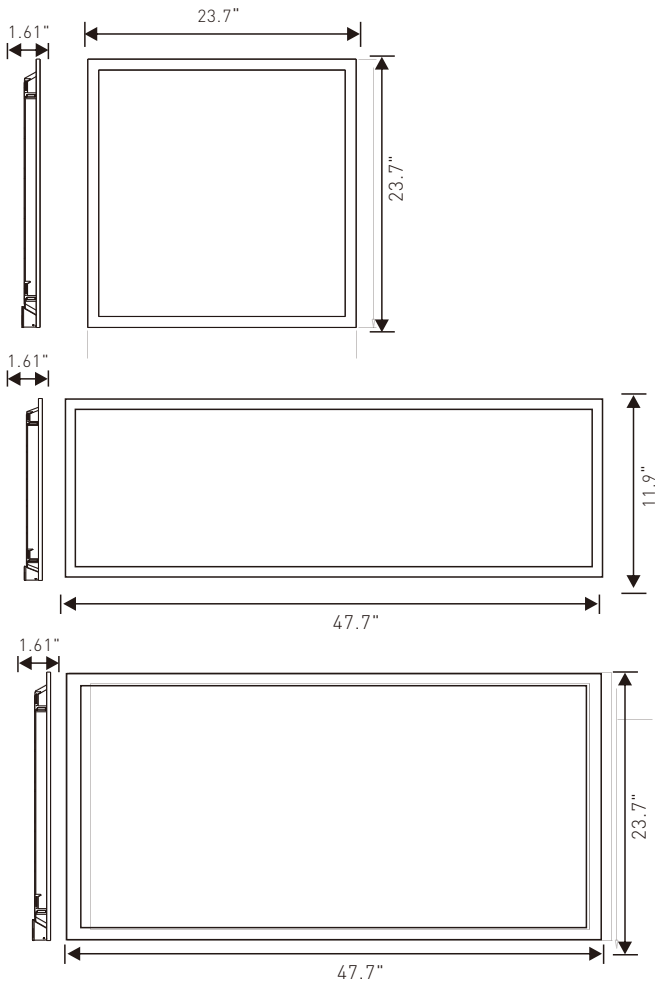

DISTRIBUTION DIAGRAM

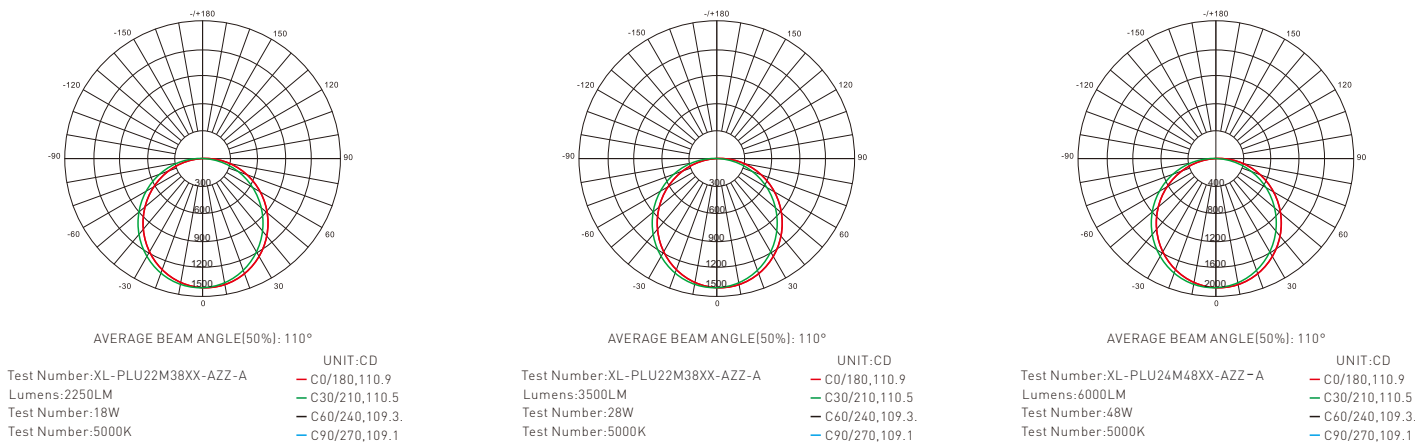

Install instruction

STEP 1: Remove boards as drawing

STEP 2:Put the lamp on the ceiling

STEP 3:Open the cover of junction box with tool
knock off the piece of top Install serpentine
coil in junction box

STEP 4: Connect wires with P2 P3 nuts
Refer the wiring diagram

STEP 5:Lock the lamp on frameworks

T-bar clips should be bent out
to provide additional safety and
support.

STEP 6: Put the board back;
and check again